



DIRECT INTERPHONE


2WDP064 USER(Installation)MANUAL

Features

- Perfect for private conversations
- Delightful 1-melody signal sound
- Easy wiring with 2lines of non-polarity
- 2Stations full direct
- Easily mounted on wall,desk
- Power: DC 6V (LR6-AA 1.5V ×4)

AC ADAPTOR DC 6V ⊙-(---⊙





Precautions for Operation



As this device consists of precise electronic components, and high voltage is generated internally, do not attempt to disassemble.



Do not drop Indoor station, and avoid strong impact.



When cleaning, never use wet hands, volatile benzene or paint thinner.




Keep away from humidifier and stove. High temperature and humidity can cause malfunction



Maintain the product clear by frequently cleaning with soft cloths

Name of Each Part

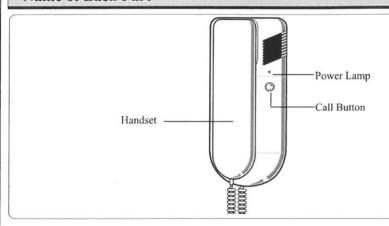

How to operate (Instruction for operating)



When a visitor pushes the maindoor station bell,




The subdoor station is ringing.




Pick up the handset and communicate with a visitor. After end of communication, return the handset where it is locked

Wring Diagram



Installation

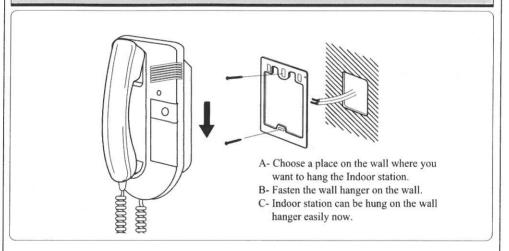

Specifications

Electric source	DC 6V (LR6-AA 1.5V \times 4) AC ADAPTOR DC 6V \odot — \leftarrow \odot	
Consumption	In use 30mA,Signal 150mA	
Signal Sound	Electronic Chime	
Wiring	2Wired non-polarity	
Range	300m(\$\phi\$ 0.65mm)	

Component

- Master station for Maindoor-use
- Substation for Subdoor-use
- Wall hanger for master station

Warranty



To receive after sales service, have the following ready when you contact our branches

- 1. Name of the product
- 2. Model number of the product
- 3. The area of problem
- 4. Phone number and address at which you can be contacted.

Warranty Card

PRODUCT	
MODEL	
DATE PURCHASED	
WARRANTY PERIOD	
AGENCY	
AGENCY ADDRESS	

N0201

MADE IN KOREA